

# KZS-2M AC B16/0.03



## Specifications

ETI Code	002173104
Description	KZS-2M AC B16/0.03
Class name	RCBO
Short circuit capacity (kA)	10
Tripping characteristic	B
Rated current (A)	16
Type	AC
Rated voltage (V)	240
Number of poles	1+N
Rated Frequency (Hz)	50/60 Hz
Standards	IEC/EN 61009
Terminals (mm <sup>2</sup> )	1-25
Rated residual operating current I $\Delta$ n (A)	0.03
Tripping time	Instantaneous

[Online product page](#)

## Other documentation





[Technical data catalogue](#)  
[3D Model](#)  
[Instruction manual](#)  
[CE declaration](#)  
[Eplan file](#)

## ETIM international classification

Classification	EC000905
Class name	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	1
Rated voltage	230V
Rated insulation voltage $U_i$	500V
Rated current	16A
Rated fault current	0.03A
Leakage current type	AC
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Voltage type	AC
Release characteristic	B
Concurrently switching neutral conductor	1
Width in number of modular spacings	2
Built-in depth	69mm
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm <sup>2</sup>
Connectable conductor cross section multi-wired	1...25mm <sup>2</sup>

## Dimension drawing

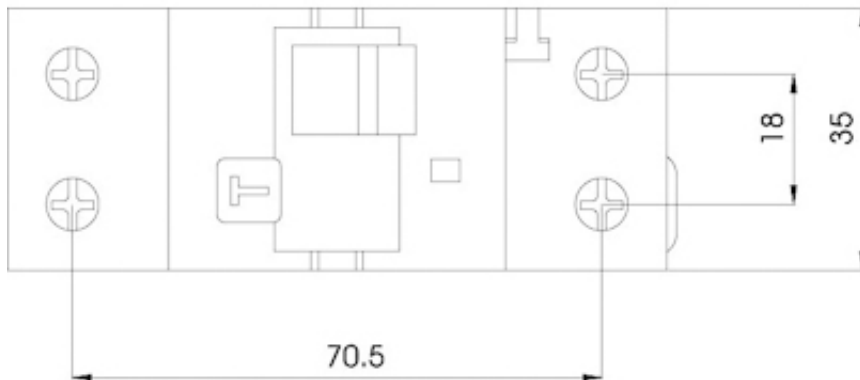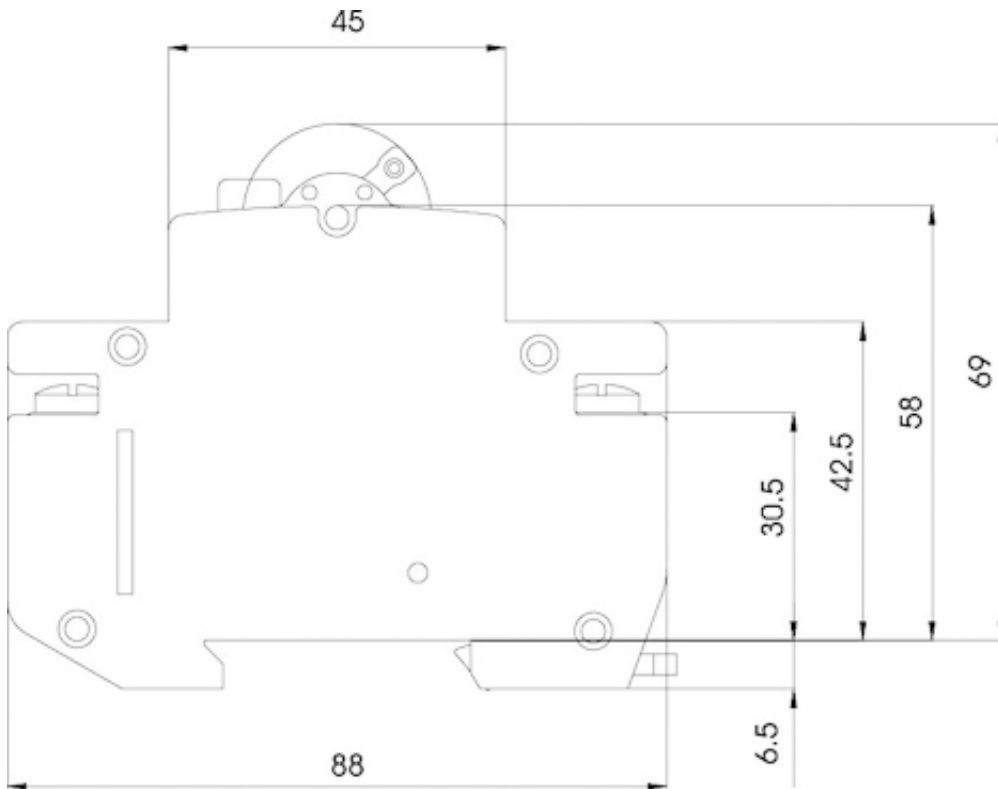

# Symbol/Connection

